


## **SYSTEM PLATON - Product specification**

### **PLATON BRICK PLUG 10x75 mm**

Description Platon Brick Plug 10x75 mm is a plug of polyacetal (POM) with a length of 75mm, and is intended for use in soft brick or stone, which is predrilled a minimum depth of 90 mm from the surface of the Platon Membrane with a drill bit of diameter 10 mm.

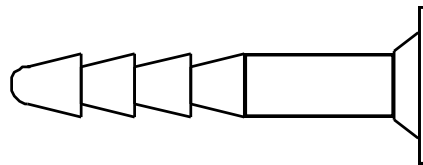

Platon Brick Plug has a head of diameter 30 mm, which is cone shaped like the back face of the Platon Membrane's stud. This gives an excellent transfer of loading from Membrane to the base structure.

There is a 5 mm hole in the shank of the plug for fixing the next layer onto the Platon Membrane, using a screw of diameter 5 to 6 mm, with screwing-in depth of max. 30 mm.

Platon Brick Plug is resistant to normally occurring chemicals in the building construction.

Pack	Box of 100
Delivery unit	Carton of 4 boxes
Article no.	413123
Applications	Sealed System Internal Walls Vaults

For further information please contact:

**Triton Chemical Manufacturing Co Ltd T/a Triton Systems**  
Units 3 – 5 Crayford Commercial Centre, Greyhound Way, Crayford, Kent DA1 4HF

**Tel:** 01322 318830

**Fax:** 01322 524017

**Email:** [info@tritonsystems.co.uk](mailto:info@tritonsystems.co.uk)

[www.tritonsystems.co.uk](http://www.tritonsystems.co.uk)

Ref: Platon Brick Plug 07/11